





The sizes are expressed in millimeters.

DESIGN DANIELE SPREGA - 2014
LAMPADA DA ESTERNO - ACCIAIO INOX AISI 316L - METALLO
OUTDOOR LAMP - METAL - AISI 316L STAINLESS STEEL

BUBKA

CE  IP65

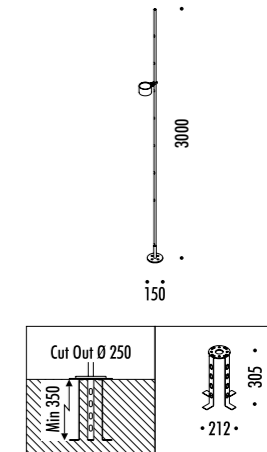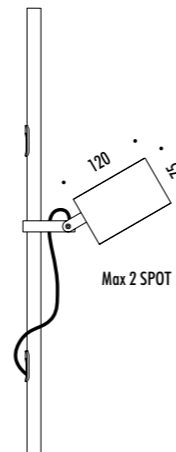

1A360000.27.20	STANDARD - 2700K	MAX 700 mA DC - 8,4 W LED 2700K - 639 lm - CRI > 90 / 3000K - 639 lm - CRI > 90
1A360000.30.20	STANDARD - 3000K	STELO IN ACCIAIO INOX AISI 316L - CAVO NERO 7 m - ORIENTABILE KIT INSTALLAZIONE OPZIONALE NON INCLUSO CONNETTORE DRIVER IP68 INCLUSO - DRIVER NON INCLUSO AIS I 316L STAINLESS STEEL STEM - BLACK CABLE 7 m - ADJUSTABLE OPTIONAL INSTALLATION KIT NOT INCLUDED DRIVER CONNECTOR IP68 INCLUDED - DRIVER NOT INCLUDED

KIT INSTALLAZIONE OBBLIGATORIO / COMPULSORY INSTALLATION KIT

1Z0241110	STANDARD	DRIVER INPUT (110-127 V) 220-240 V - 50/60 Hz - OUTPUT 700 mA DC - (15 W) 30 W - IP68 NOT DIMMABLE
-----------	----------	--

KIT INSTALLAZIONE OPZIONALI / OPTIONAL INSTALLATION KITS

1A362000.00.00	STANDARD	TIRAFONDO INSTALLAZIONE / INSTALLATION ANCHORING BOLT DIMENSIONI TAGLIO Ø 250 mm - SPAZIO MINIMO PER INCASSO 350 mm CUT-OUT Ø 250 mm - MINIMUM SPACE FOR MOUNTING 350 mm
----------------	----------	--

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

1A3610400.27.20	NERO OPACO / MATT BLACK - 2700K	TESTA LED SUPPLEMENTARE / ADDITIONAL LED HEAD MAX 700 mA DC - 8,4 W LED
1A3610400.30.20	NERO OPACO / MATT BLACK - 3000K	2700K - 639 lm - CRI > 90 / 3000K - 639 lm - CRI > 90 DRIVER NON INCLUSO / DRIVER NOT INCLUDED
1A1660000.00.00	STANDARD	CONNETTORE DRIVER IP68 - 1 PEZZO DRIVER CONNECTOR IP68 - 1 PIECE