
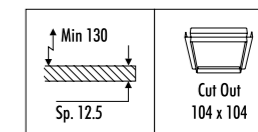



The sizes are expressed in millimeters.

DESIGN 2016  
LAMPADA DA INCASSO DA SOFFITTO - METALLO  
RECESSED CEILING LAMP - METAL

MINI 51

CE IP20    1.0 m 

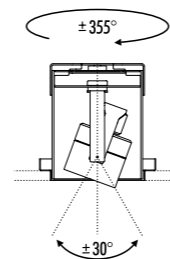








1A0660300.00.00	BIANCO OPACO / MATT WHITE - ON/OFF	100-240 V - 50/60 Hz - MAX 10 W LED - GU10 ORIENTABILE KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO LAMPADINA NON INCLUSA ACCESSORI OPZIONALI LAMPADINA ADJUSTABLE COMPULSORY INSTALLATION KIT NOT INCLUDED BULB NOT INCLUDED OPTIONAL BULB ACCESSORIES
1A0660400.00.00	NERO OPACO / MATT BLACK - ON/OFF	


KIT INSTALLAZIONE OBBLIGATORI / COMPULSORY INSTALLATION KITS

1A3500300.00.00	BIANCO OPACO / MATT WHITE	CORNICE PER CARTONGESSO 12,5 mm / PLASTERBOARD FRAME 12,5 mm DIMENSIONI TAGLIO CARTONGESSO 104 x 104 mm - SPAZIO MINIMO PER INCASSO 130 mm PLASTERBOARD CUT-OUT 104 x 104 mm - MINIMUM SPACE FOR MOUNTING 130 mm
1A3500400.00.00	NERO OPACO / MATT BLACK	

CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CRI (Ra)	DIMMABLE	PRODUCT REFERENCE
------	--------	---------	---------	----------------	-----------------	---------------	-----------------	----------	----------	-------------------

LAMPADINE LED / LED BULBS

	50330500	GU10	220-240 V	5,5 W	25°	3000K	375 lm	G	97	X	DOT P 51 DOT P DE 51 DOT PL 51 DOT R 51 DOT SISTEMA 51 MINI 51 MINI BIT 51 MINI PL 51 MOON 60 DE TRICK TRACK
	50330740	GU10	220-240 V	4,9 W	120°	3000K	550 lm	E	80	-	Q
	50330450	GU4	12 V	20 W	24°	2700K	200 lm	G	80	-	OVO OVONELPIATTO
	50330530	GU5,3	12 V	6,7 W	36°	3000K	440 lm	G	97	X	BUCO R
	50041410	E14	220-240 V	4,5 W	-	2700K	470 lm	F	>80	X	PALPEBRA
	52080010	E27	220-240 V	7 W	360°	2700K	806 lm	E	80	X	ABA 45 ABA 120 EDI SON
	50330790	E27	220-240 V	11,2 W	360°	2700K	1521 lm	D	90	X	MOON 60 MOON 60 DE MOON 80 MOON 200 MOON T SHOJI
	50330650	E27	220-240 V	13 W	200°	2700K	1521 lm	E	80	-	LENTA SHOJI OUTDOOR
	50041470	E27	220-240 V	21 W	200°	2700K	2452 lm	E	>80	X	MOON 120
	50330730	E27	220-240 V	9,5 W	25°	3000K	760 lm	F	80	X	CHILLOUT NEURO

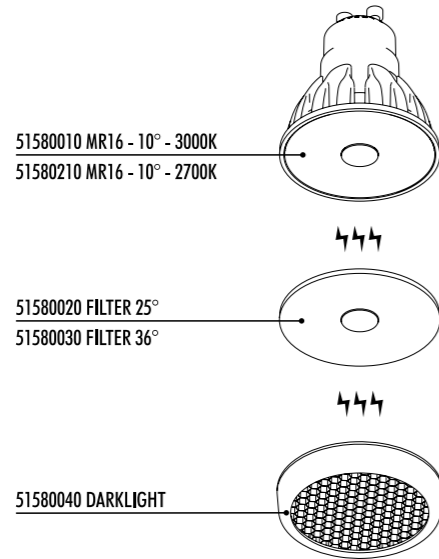

CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CrI (Ra)	DIMMABLE	PRODUCT REFERENCE	
<b>LAMPADINE LED SORAA MR16 - DIMMERABILE IGBT / SORAA LED BULBS MR16 - IGBT DIMMABLE</b>											
🔔	51580210	GU10	230 V	7,5 W	10°	2700K	390 lm	G	95	X	DOT P 51 DOT P DE 51 DOT PL 51 DOT R 51 DOT SISTEMA 51
	51580010	GU10	230 V	7,5 W	10°	3000K	410 lm	G	95	X	MINI 51 MINI BIT 51 MINI PL 51 TRICK TRACK

**ACCESSORI "POINT SOURCE OPTICS" PER GENERARE FASCI UNIFORMI E DI ALTA INTENSITA' / "POINT SOURCE OPTICS" ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS**

51580020	FILTER - MR16			25°							DOT P 51 DOT P DE 51 DOT PL 51 DOT R 51 DOT SISTEMA 51
51580030	FILTER - MR16			36°							MINI 51 MINI BIT 51 MINI PL 51 TRICK TRACK
51580040	DARKLIGHT - MR16			-							

**MODULI LED DG111 / DG111 LED MODULES**

1A470000.27.20	500 mA DC	16,7 W	15°	2700K	1648 lm	F	90	X	PUNTO PUNTO PL PUNTO 2 PL SPOT SPOT SISTEMA
1A470000.30.20	500 mA DC	16,7 W	15°	3000K	1682 lm	F	90	X	
1A389000.27.20	500 mA DC	16,7 W	22°	2700K	1859 lm	F	90	X	
1A389000.30.20	500 mA DC	16,7 W	22°	3000K	1945 lm	F	90	X	
1A390000.27.20	500 mA DC	16,7 W	36°	2700K	1808 lm	F	90	X	
1A390000.30.20	500 mA DC	16,7 W	36°	3000K	1890 lm	F	90	X	
1A470000.27.20	350 mA DC	11,7 W	15°	2700K	1336 lm	F	90	X	SPOT ENDLESS SPOT ENDLESS CASAMBI
1A470000.30.20	350 mA DC	11,7 W	15°	3000K	1364 lm	F	90	X	
1A389000.27.20	350 mA DC	11,7 W	22°	2700K	1508 lm	F	90	X	
1A389000.30.20	350 mA DC	11,7 W	22°	3000K	1578 lm	F	90	X	
1A390000.27.20	350 mA DC	11,7 W	36°	2700K	1266 lm	F	90	X	
1A390000.30.20	350 mA DC	11,7 W	36°	3000K	1323 lm	F	90	X	

**ACCESSORI OPZIONALI MODULO LED / OPTIONAL LED MODULE ACCESSORIES**

1A121000.00.00	STANDARD			DARKLIGHT						PUNTO PUNTO PL PUNTO 2 PL SAMPEI 230 SAMPEI 260 SAMPEI 290 SAMPEI 440 SPOT SPOT ENDLESS SPOT ENDLESS CASAMBI SPOT SISTEMA
----------------	----------	--	--	-----------	--	--	--	--	--	---