


Almendra Organic Suspension Short 3

Designed by Patricia Urquiola, 2022

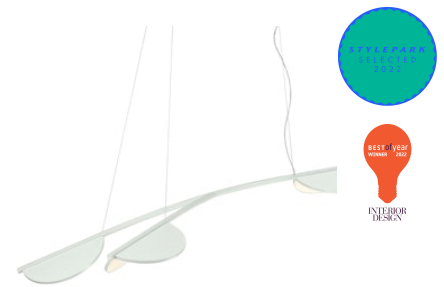

45W - 1755lm - 2700K - CRI> 95

Suspension lamp emitting diffused light in an organic, branch-like composition. Aluminium tubular structure with CNC-machined terminals in matt or metallised finish. Integrated Edge Lighting technology. Light units can rotate in 60° steps to adjust emission direction. Matt white metal ceiling rose with integrated electronics supporting 1–10 V, DALI or push-dim dimming.

Almendra by Patricia Urquiola is a modular lighting system inspired by the almond tree, from which it takes its name. Its softly curved modules recall seeds or shells, natural yet mechanical in form, arranged in linear or branching compositions. A synthesis of poetry and sustainability, it reflects recurring themes in Urquiola's work, brought to life through beautiful design and advanced technology. Winner of a Stylepark Selected Award 2022.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607048498
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	45
Lumen Output (lm)	1755

Physical

Colour	Off-white
Length (mm)	1611
Cord colour	Clear
Cord length (mm)	2600
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	10.43
Package volume (m3)	0.25
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)

Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class E




REPLACEABLE2



PWRSUPRPL2

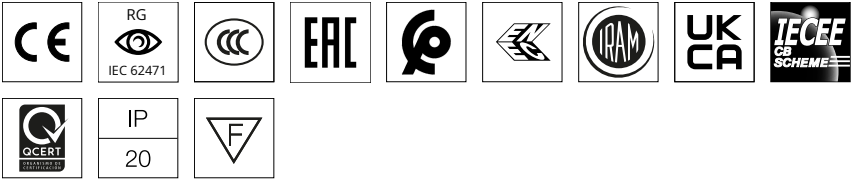

Schematic light drawing




Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)

Spare Parts

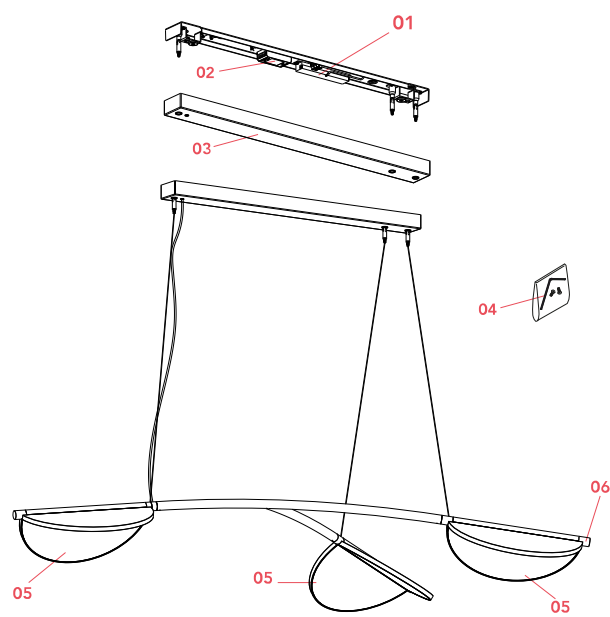

- | | | |
|-----|---|-----------|
| 01. | Driver 96W 48V 220-240V | RF32405 |
| 02. | Led dimmer kit | RF34197 |
| 03. | Almendra S Y white cover | RF0429109 |
| 04. | Kit with screws and allen key | RF3160100 |
| 05. | Almendra Suspension White body assembly | RF32514 |
| 06. | Almendra S Arc/Y terminal joint L31 White | RF33246 |



RF32405

Driver 96W 48V 220-240V



RF34197

Led dimmer kit



RF0429109

Almendra S Y white cover



RF3160100

Kit with screws and allen key



RF32514

Almendra Suspension White body assembly



RF33246

Almendra S Arc/Y terminal joint L31 White