

Davide Groppi / 2023

COLIBRÌ

Wall or ceiling lighting system with direct light for indoor use.

A minimal track system with tiny lights, small humming birds that perch where needed.

The matt white or matt black painted aluminium track is available in 1 m, 2 m and 3 m lengths.
A range of connection and suspension accessories is available.
The base of the spotlight is in matt black polycarbonate.
The spotlight is in matt black anodised aluminium and is adjustable in all directions.

The track is powered at 48V DC and is modular.

Sistema di illuminazione da soffitto o da parete, a luce diretta, per interni.


Un sistema a binario ridotto al minimo, con minuscoli corpi luminosi, piccoli Colibrì che si posano dove necessario.

Il binario è in alluminio verniciato bianco opaco o nero opaco ed è disponibile nelle misure di 1 m, 2 m e 3 m.
Sono disponibili diversi accessori di aggregazione e sospensione.
La base del proiettore è in policarbonato nero opaco.
Il proiettore è in alluminio anodizzato nero opaco ed è orientabile in tutte le direzioni.


Il binario funziona a 48V DC ed è componibile.

Finish **.04** Matt Black

COLIBRÌ
Layout example of
wall and ceiling version

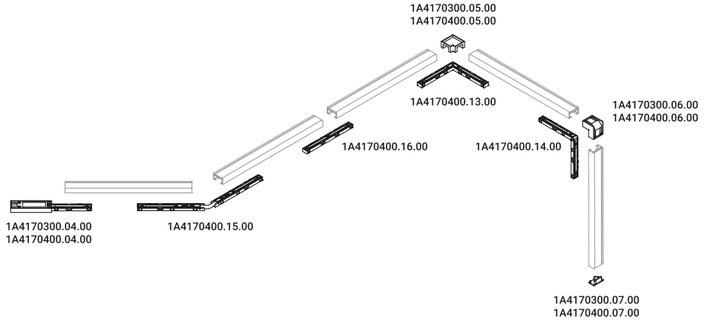


COLIBRÌ
Layout example of
recessed version

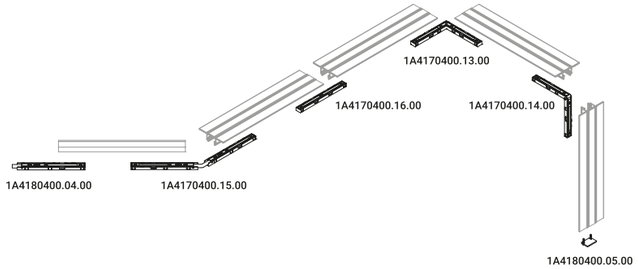

The sizes are expressed in millimeters.

Compulsory accessories / Accessori obbligatori


Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto



Wall and ceiling track - 1 m / Binario da parete e soffitto - 1 m		Not included
Matt White		1A4170300.01.00
Matt Black		1A4170400.01.00

Wall and ceiling track - 2 m / Binario da parete e soffitto - 2 m		Not included
Matt White		1A4170300.02.00
Matt Black		1A4170400.02.00

Wall and ceiling track - 3 m / Binario da parete e soffitto - 3 m		Not included
Matt White		1A4170300.03.00
Matt Black		1A4170400.03.00




Power connector / Elemento di alimentazione		Not included
Matt White	Output 48V DC - Max 10A	1A4170300.04.00
Matt Black	Output 48V DC - Max 10A	1A4170400.04.00



End cap / Tappo di chiusura		Not included
Matt White		1A4170300.07.00
Matt Black		1A4170400.07.00


Installation kits for recessed track / Kit d'installazione per binario da incasso



Recessed wall and ceiling track - 1 m / Binario da parete e soffitto da incasso - 1 m		Not included
Matt Black		1A4180400.01.00

Recessed wall and ceiling track - 2 m / Binario da parete e soffitto da incasso - 2 m		Not included
Matt Black		1A4180400.02.00

Recessed wall and ceiling track - 3 m / Binario da parete e soffitto da incasso - 3 m		Not included
Matt Black		1A4180400.03.00




Power connector / Elemento di alimentazione		Not included
Matt Black	Output 48V DC - Max 10A For recessed track	1A4180400.04.00



End cap / Tappo di chiusura		Not included
Matt Black	For recessed track	1A4180400.05.00


Compulsory accessories / Accessori obbligatori

Drivers / Alimentatori



Driver with optoisolator / Alimentatore con optoisolatore — Not included

	Input 100-240V - 50/60Hz Output 48V - 60W - IP20 - DALI	1A4170000.19.00



Driver with optoisolator / Alimentatore con optoisolatore — Not included

	Input 100-240V - 50/60Hz Output 48V - 150W - IP20 - DALI	1A2810000.11.00

Optional accessories / Accessori opzionali

Installation kits for wall and ceiling track / Kit d'installazione per binario da parete e soffitto



Corner joint cover H / Coprigiunto angolare H — Not included

Matt White	For wall and ceiling track	1A4170300.05.00
Matt Black	For wall and ceiling track	1A4170400.05.00




Corner joint cover V / Coprigiunto angolare V — Not included

Matt White	For wall and ceiling track	1A4170300.06.00
Matt Black	For wall and ceiling track	1A4170400.06.00



Cover - 3 m / Copertura - 3 m — Not included

Matt White	For wall and ceiling track	1A4170300.08.00
Matt Black	For wall and ceiling track	1A4170400.08.00



Endless connector / Connettore Endless — Not included

Standard	Output 48V DC - Max 3A For wall and ceiling track	1A4170000.20.00

Installation kits for recessed track / Kit d'installazione per binario da incasso



Cover - 3 m / Copertura - 3 m — Not included

Matt White	For recessed track	1A4180300.08.00
Matt Black	For recessed track	1A4180400.08.00

The sizes are expressed in millimeters.


Optional accessories / Accessori opzionali

Installation kits / Kit d'installazione




L connector / Connettore a L — Not included

Matt Black	Output 48V DC - Max 10A	1A4170400.13.00




Ceiling-wall connector / Connettore soffitto-parete — Not included

Matt Black	Output 48V DC - Max 10A	1A4170400.14.00



Flexible joint / Giunto flessibile — Not included

Matt Black	Output 48V DC - Max 10A	1A4170400.15.00



Linear connector / Connettore lineare — Not included


Matt Black	Output 48V DC - Max 10A	1A4170400.16.00



Locking tool / Strumento per bloccaggio — Not included

Standard		1A4170000.17.00

Other accessories / Altri accessori




Shelf / Mensola — Not included

Matt Black	For wall and ceiling track	1A4170400.21.00


Compulsory accessories / Accessori obbligatori

Luminaires / Corpi illuminanti




COLIBRÌ 18 - 15°
2W - 0,05A
48V DC
2700K - 81lm / 3000K - 84lm
CRI >90
Beam 15°
Driver integrated
DALI
IP20

Matt Black - 2700K - DALI	1A4260400.27.01
Matt Black - 3000K - DALI	1A4260400.30.01




COLIBRÌ 18 - 25°
2W - 0,05A
48V DC
2700K - 79lm / 3000K - 81lm
CRI >90
Beam 25°
Driver integrated
DALI
IP20

Matt Black - 2700K - DALI	1A4270400.27.01
Matt Black - 3000K - DALI	1A4270400.30.01



COLIBRÌ 28 - 15°
4W - 0,10A
48V DC
2700K - 147lm / 3000K - 151lm
CRI >90
Beam 15°
Driver integrated
DALI
IP20

Matt Black - 2700K - DALI	1A4280400.27.01
Matt Black - 3000K - DALI	1A4280400.30.01



COLIBRÌ 28 - 25°
5W - 0,13A
48V DC
2700K - 250lm / 3000K - 258lm
CRI >90
Beam 25°
Driver integrated
DALI
IP20

Matt Black - 2700K - DALI	1A4290400.27.01
Matt Black - 3000K - DALI	1A4290400.30.01