

# FLOS

■ F0269000 Black

## Noctambule Floor 2 High Cylinder Cone Small Base

Designed by Konstantin Grcic, 2019




45W - 1174lm - 2700K - CRI> 90

Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

EAN	8059607000632
Mounting	Floor
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
System flux (lm)	1174

### Physical


Colour	Black
Length (mm)	365
Cord colour	Black
Cord length (mm)	1800
Net weight (kg)	18
Package volume (m3)	0.31
IP internal	20

### Download


- [Mounting instructions](#) PDF
- [Mounting instructions](#) PDF

### Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class E




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user



## Schematic light drawing



Luminous flux Luminaire  
286 lm


### Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

### Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

## Spare Parts

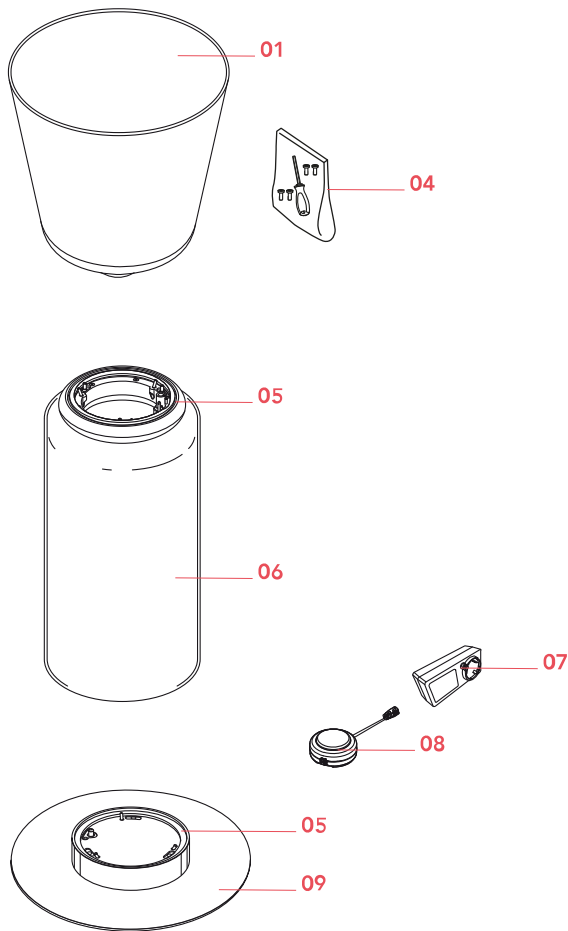

01.	Noctambule Cone	F0260000
04.	Fixing screws kit	RF0254100
05.	Ring led diffuser	RF27498
06.	Noctambule High Cylinder	F0257000
07.	Black plug assembly kit & 48V driver	RF6600130
09.	Small base	F0261030



F0260000  
Noctambule Cone



RF0254100  
Fixing screws kit



RF27498  
Ring led diffuser



F0257000  
Noctambule High Cylinder



RF6600130  
Black plug assembly kit & 48V driver



F0261030  
Small base